

DECOMETAL® BY FORMICA GROUP




POSTFORMING TECHNICAL DATA

RECOMMENDED APPLICATION

POSTFORMING

Grade 82 is a special formula phenolic-backed metal laminate that can be heat postformed to radii as tight as $\frac{3}{8}$ " (9.5mm). The postforming process is similar to Formica® Brand Laminate, except the temperature is lower. 248° F (120° C) is the ideal temperature. Lower temperatures than 248° F (120° C) can cause cracking of the phenolic core, whereas higher temperatures can cause delamination and bubbling between aluminum foil surface and the phenolic core. Heater temperature, time of exposure to the heater, and the reflectance of the aluminum are some of the factors to consider. Since equipment can vary, it is recommended to test these conditions prior to fabrication using Tempilaq® temperature indicator. Refer to DecoMetal® Technical Data (Form No. 08-101 (02/00)) for more information on substrate selection, storage and limitations.




Storyboard illustration 1

SENSITIVE PAINT

LEAVE PEELFILM ON DURING POSTFORMING.

1. Radius core materials.
2. Bond Grade 82 DecoMetal to the core material with a neoprene contact cement that has been formulated for postforming.
3. Apply at 248° F (120° C) temperature-sensitive paint (such as Tempilaq®) to the back of the DecoMetal laminate sheet in an inconspicuous place in the area to be radiused.

NOTE: Always apply the temperature sensitive paint in the oversized or off-fall area, as the paint will telegraph through.
4. Leaving the peelcoat on the face, place the area to be formed over the heater, face down. Hold over heater until temperature-sensitive paint indicates.
5. Quickly remove from heat source and form into fixture until cool. Remove from fixture and jay roll.

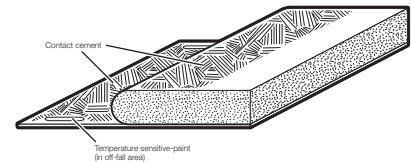


Storyboard illustration 2


GRADE 83 COLD FORMING

DecoMetal® solid metals can be cold formed and bent using sheet metal fabrication techniques. Sheet metal brakes and pipe rollers can be used to shade the metal prior to bonding to substrates.

For $\frac{3}{8}$ " (9.5mm) radius, the above technique for Grade 82 can be used, skipping steps three and four (no heat required). Note: Very tight radii, less than $\frac{1}{8}$ " (3.1mm), can crack the anodized finish. Always test first.

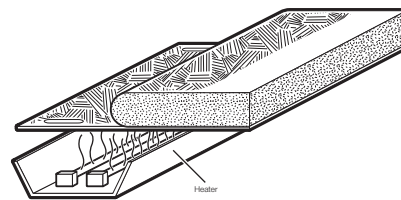

Storyboard illustration 3



Storyboard illustration 4

DECOMETAL® BY FORMICA GROUP



POSTFORMING TECHNICAL DATA

USE AND CARE

DecoMetal® metal laminate and solid metal may be cleaned with a damp cloth and mild detergent or citrus cleaner. If in doubt about the suitability of a particular cleaner or detergent, check with its manufacturer. Use of abrasive cleaners, powders, scouring pads, steel wool, sandpaper, etc., will damage the finish. Acid or alkaline-based cleaners, compounds, solvents, etc., will mar, etch, corrode, and permanently discolor DecoMetal laminate products. Never use these materials on DecoMetal laminate items, nor allow bottles, rags, etc., contaminated with them to contact the surface. Accidental spills or splatters from these harsh materials should be wiped off immediately, and the area cleaned thoroughly with a damp cloth.

EXAMPLES OF THESE MATERIALS ARE:

drain cleaners	coffeepot cleaners
ceramic cooktop cleaners	chlorine bleach
some countertop cleaners	rust removers
metal cleaners	tub and tile cleaners
oven cleaners	toilet bowl cleaners

Use hexane, heptane, or citrus cleaner to remove contact adhesive overspray.

LIMITED WARRANTY

Formica Corporation expressly warrants that, for a period of one (1) year from the date of first sale, DecoMetal® metal laminate and solid metal will be reasonably free of defects in materials and workmanship, and that when properly handled and fabricated will conform, within accepted tolerances, to applicable manufacturing specifications. This limited warranty applies only to DecoMetal laminate items that are stored, handled, fabricated and installed in the manner recommended by Formica Corporation. Due to the variety of uses and applications to which DecoMetal laminate products may be put, FORMICA CORPORATION CAN MAKE NO WARRANTY THAT THIS PRODUCT IS SUITABLE FOR ANY PARTICULAR PURPOSE AND CAN MAKE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, OTHER THAN THOSE SET FORTH ABOVE.

Buyer's exclusive remedy for any loss or claim resulting from the use or inability to use this product shall be replacement of the defective Formica DecoMetal item, or at the option of Formica Corporation, return of the product and refund of the purchase price. IN NO EVENT SHALL FORMICA CORPORATION BE LIABLE IN EITHER TORT OR CONTRACT FOR ANY LOSS OR DIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES.

This limited warranty gives the purchaser of DecoMetal laminate products specific legal rights. Other rights may be available that vary from state to state.

Any information or suggestion concerning applications, specifications or compliances with codes and standards is provided solely for your convenient reference and without any representation as to accuracy or suitability. Formica Corporation disclaims any legal responsibility. The user must verify and test the suitability of any information or products for the specific application.

IMPORTANT NOTICE

The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which Formica Corporation assumes legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein. NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE.

MANUFACTURER

Formica® Brand Laminate sheets are manufactured by Formica Corporation.

TECHNICAL SERVICES

Technical assistance may be obtained through your local Formica® Brand Products Distributor or from Formica Corporation trained representatives in sales offices throughout the country. To assist these representatives, Formica Corporation maintains a sales and technical services staff in Cincinnati, Ohio. For technical assistance, contact your distributor or sales representative; write the company directly at Formica Corporation Technical Services Department, 10155 Reading Road, Cincinnati, OH, 45241; call (513) 786-3578 or 1-800-FORMICA™; or fax (513) 786-3195. In Canada, call 1-800-363-1405. In Mexico, call (525) 530-3135.

Formica is a sublicensed trademark to Formica Corporation. Formica and the Formica Anvil logo are registered trademarks of The Diller Corporation. 1-800-FORMICA is a trademark of The Diller Corporation. The products and manufacturing processes of Formica Corporation are protected under U.S. and foreign patents.

All ® brands are registered trademarks of the respective owners. All ™ brands are trademarks of the respective owners.

For warranty information, please visit www.formica.com or call 1-800-FORMICA™.

©2019 Formica Corporation
Cincinnati, Ohio 45241